

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement

This product and if applicable the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the Low Voltage Directive 2014/35/EU, the EMC Directive 2014/30/EU, the RoHS Directive 2011/65/EU.

2012/19/EU (WEEE directive): Products marked with this symbol should not be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info.

2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information, see: www.recyclethis.info.

Industry Canada ICES-003 Compliance

This device meets the CAN ICES 3 (A)/NMB-3(A) standards requirements.

Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Safety Instruction

These instructions are intended to ensure that user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into "Warnings" and "Cautions".

Warnings: Serious injury or death may occur if any of the warnings are neglected.

Cautions: Injury or equipment damage may occur if any of the cautions are neglected.

| | |
|---|--|
| | |
| Warnings: Follow these safeguards to prevent serious injury or death. | Cautions: Follow these precautions to prevent potential injury or material damage. |

Warnings

- In the use of the device, you must be in strict compliance with the electrical safety regulations of the nation and region.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 12 VDC according to the IEC60950-1 standard. Refer to technical specifications for detailed information.
- Do not connect multiple devices to one power adapter to avoid over heating or a fire hazard caused by overload.
- Make sure that the plug is firmly connected to the power socket.
- Make sure that the device is firmly fixed if wall mounting or ceiling mounting is adopted.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cord, and then contact the service center.
- Never attempt to disassemble the camera by unprofessional personal.

Cautions


- Do not drop the camera or subject it to physical shock.
- Do not touch sensor modules with fingers.
- Do not place the camera in extremely hot, cold (the operating temperature shall be -40°C to 60°C), dusty or damp locations, and do not expose it to high electromagnetic radiation.
- If cleaning is necessary, use clean cloth with a bit of ethanol and wipe it gently.
- Do not aim the camera at the sun, or extra bright places.
- The sensor may be turned out by a laser beam, so when any laser equipment is in using, make sure that the surface of sensor will not be exposed to the laser beam.
- Do not expose the device to high electromagnetic radiation or extremely hot, cold, dusty or damp environment.
- To avoid heat accumulation, good ventilation is required for the operating environment.
- Keep the camera away from liquid while in use for non-water-proof device.
- While in delivery, the camera shall be packed in its original packing, or packing of the same texture.

1 Introduction

1.1 Product Features

- The main features are as follows:
- High performance CMOS sensor
 - OSD menu with configurable parameters
 - 24-hour color image
 - Smart light
 - 3-axis adjustment

1.2 Overview



Note:

Press and hold the switch button for 5 seconds to switch the video output. Four kinds of video outputs are available: TVI, AHD, CVI, and CVBS.

2 Installation

Before you start:

- Make sure that the device in the package is in good condition and all the assembly parts are included.
- Make sure that all the related equipment is power-off during the installation.
- Check the specification of the products for the installation environment.
- Check whether the power supply is matched with your power output to avoid the damage.
- Make sure the wall is strong enough to withstand three times the weight of the camera, and the mount.
- If the wall is cement, insert expansion bolts before installing the camera. If the wall is wooden, use self-tapping screws to secure the camera.
- If the product does not function properly, contact your dealer or the nearest service center. Do NOT disassemble the camera for repair or maintenance by yourself.

2.1 Ceiling/Wall Mounting without Junction Box

The installation of ceiling mounting and wall mounting are similar. Following takes ceiling mounting as an example.

Steps:

1. Paste the drill template (supplied) to the place where you want to install the camera.
2. Drill the screw holes and the cable hole (optional) on the ceiling according to the drill template.

EN




Figure 2-1 Drill Template

- Note:**
1. Drill the cable hole, when adopting the ceiling outlet to route the cable.
 3. Route the cables through the cable hole, or the side opening.
 4. Attach the bracket to the ceiling, and secure the camera with supplied screws.




Figure 2-2 Secure the Camera to the Ceiling

Note:

- The supplied screw package contains self-tapping screws, and expansion bolts.
 - For cement wall/ceiling, expansion bolts are required to fix the camera. For wooden wall/ceiling, self-tapping screws are required.
5. Connect the corresponding power cord, and video cable.
 6. Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, loosen the bracket adjusting nut to adjust the position.




Figure 2-3 3-Axis Adjustment

2.2 Ceiling/Wall Mounting with Junction Box

Before you start:

You need to purchase a junction box in advance.

Steps:

1. Paste the drill template (supplied) on the ceiling/wall.
2. Drill screw holes and the cable hole on the ceiling according to the drill template.



Figure 2-4 Drill Template of Junction Box

3. Take apart the junction box, and align the screw holes of the camera with those on the junction box's cover.
4. Attach the camera on the junction box's cover with supplied screws.




Figure 2-5 Attach the Camera on the Junction Box's Cover

5. Secure the junction box's body on the ceiling/wall with supplied screws.




Figure 2-6 Secure the Junction Box on the Wall/Ceiling

6. Route the cables through the bottom cable hole, or the side cable hole of the junction box.
7. Combine the junction box cover with its body.




Figure 2-7 Combine the Junction Box Cover back to its Body

8. Repeat the step 5 to 6 of 2.1.1 Ceiling/Wall Mounting without Junction Box to finish the installation.

3 Menu Description

Please follow the steps below to call the menu.

Note: The actual display may vary with your camera model.

Steps:

1. Connect the camera with the TVI DVR, and the monitor, shown as the figure 3-1.




Figure 3-1 Connection

2. Power on the camera, TVI DVR, and the monitor to view the image on the monitor.
3. Click PTZ Control to enter the PTZ Control interface.
4. Call the camera menu by clicking button, or call the preset No. 95.

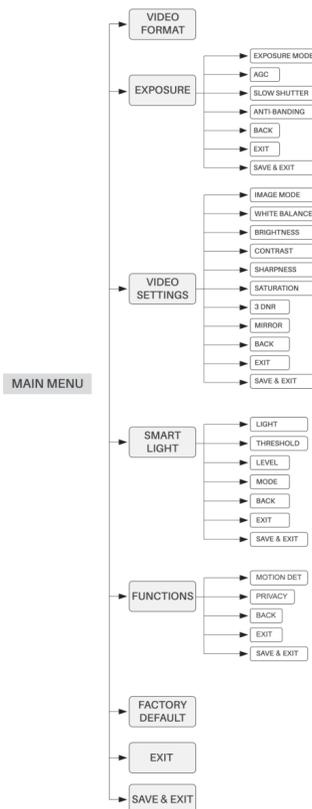


Figure 3-2 Main Menu Overview

5. Click the direction arrow to control the camera.

1. Click up/down direction button to select the item.
2. Click Iris + to confirm the selection.
3. Click left/right direction button to adjust the value of the selected item.

3.1 VIDEO FORMAT

You can set the video format to 5MP@20fps, 4MP@30fps, 4MP@25fps, 2MP@30fps or 2MP@25fps.

3.2 EXPOSURE

EXPOSURE MODE

You can set the EXPOSURE MODE to GLOBAL, BLC, HLC, WDR, or HLS.

• GLOBAL

BLC (Backlight Compensation) compensates light to the object in the front to make it clear, but this may cause the over-exposure of the background where the light is strong.

• BLC (Backlight Compensation)

BLC (Backlight Compensation) compensates light to the object in the front to make it clear, but this may cause the over-exposure of the background where the light is strong.

• HLC (Highlight Compensation)

HLC stands for highlight compensation. The camera detects the strong spots (the over-exposure portion of image), then reduce the brightness of the strong spots to improve the overall images.

• WDR (Wide Dynamic Range)

The wide dynamic range (WDR) function helps the camera provide clear images even under back light circumstances. When there are both very bright and very dark areas simultaneously in the field of view, WDR balances the brightness level of the whole image and provide clear images with details.

• HLS (Highlight Suppression)

It is the same visual effect as the solar eclipse. If the brightness of a part in the image exceeds the threshold, this part will become black. Then whole image can be clear.

AGC (Auto Gain Control)

It optimizes the clarity of the image in poor light conditions. The AGC level can be set to HIGH, MEDIUM, or LOW.

Note: The noise will be amplified when setting the AGC level.

SLOW SHUTTER

SLOW SHUTTER increases the exposure time on a single frame, which makes a camera more sensitive to the light so it can produce images even in low lux conditions.

ANTI-BANDING

ANTI-BANDING is a camera setting that prevents the appearance of horizontal lines (banding) when photographing images in the low frequency light and high brightness environments.

3.3 VIDEO SETTINGS

Move the cursor to VIDEO SETTINGS and click Iris+ to enter the submenu. IMAGE MODE, WHITE BALANCE, BRIGHTNESS, CONTRAST, SHARPNESS, SATURATION, 3 DNR, and MIRROR are adjustable.

| VIDEO SETTINGS | |
|----------------|---------|
| IMAGE MODE | ◀ STD ▶ |
| WHITE BALANCE | ↵ |
| BRIGHTNESS | ◀ 5 ▶ |
| CONTRAST | ◀ 5 ▶ |
| SHARPNESS | ◀ 5 ▶ |
| SATURATION | ◀ 5 ▶ |
| 3DNR | ◀ 5 ▶ |
| MIRROR | ◀ OFF ▶ |
| BACK | ↵ |
| EXIT | ↵ |
| SAVE & EXIT | ↵ |

Figure 3-3 VIDEO SETTING

IMAGE MODE

IMAGE MODE is used to adjust the image saturation, and you can set it to STD (Standard) or HIGH-SAT (High Saturation).

WHITE BALANCE

White balance, the white rendition function of the camera, is to adjust the color temperature according to the environment. It can remove unrealistic color casts in the image. You can set WHITE BALANCE mode to AUTO, or MANUAL.

• AUTO

Under AUTO mode, white balance is being adjusted automatically according to the color temperature of the scene illumination.

• MANUAL

You can set the R-GAIN/B-GAIN value to adjust the shades of red/blue color of the image.

| WHITE BALANCE | |
|---------------|------------|
| MODE | ◀ MANUAL ▶ |
| R-GAIN | ◀ 5 ▶ |
| B-GAIN | ◀ 5 ▶ |
| BACK | ↵ |
| EXIT | ↵ |
| SAVE&EXIT | ↵ |

Figure 3-4 MWB MODE

BRIGHTNESS

Brightness refers to the brightness of the image. You can set the brightness value from 1 to 9 to darken or brighten the image. The greater the value is, the brighter the image is.

CONTRAST

This feature enhances the difference in color and light between parts of an image.

SHARPNESS

Sharpness determines the amount of detail an imaging system can reproduce.

SATURATION

Saturation is the proportion of pure chromatic color in the total color sensation. Adjust this feature to change the saturation of the color.

3 DNR (3D DNR)

3 DNR refers to 3D digital noise reduction. Comparing with the general 2D digital noise reduction, the 3D digital noise reduction function processes the noise between two frames besides processing the noise in one frame. The noise will be much less and the video will be clearer.

MIRROR

OFF, H, V, and HV are selectable for mirror.

OFF: The mirror function is disabled.

H: The image flips 180° horizontally.

V: The image flips 180° vertically.

HV: The image flips 180° both horizontally and vertically.

3.4 SMART LIGHT

Under the SMART LIGHT sub-menu, you can set the mode to OFF or AUTO.

• OFF

Set it to OFF to give up this function.

• AUTO

You can set THRESHOLD and LEVEL in this section.

| SMART LIGHT | |
|-------------|----------|
| LIGHT | ◀ AUTO ▶ |
| THRESHOLD | ◀ 2 ▶ |
| LEVEL | ◀ 5 ▶ |
| MODE | MODE1 |
| BACK | ↵ |
| EXIT | ↵ |
| SAVE & EXIT | ↵ |

Figure 3-5 SMART LIGHT

3.5 FUNCTION

3.5.1 MOTION DET

MOTION DET refers to motion detection. With motion detection feature, motion can be detected in any part of a camera's view. You can configure full screen or a number of zones in a camera's view where motion is to be detected.

3.5.2 PRIVACY

This function allows you to block or mask certain area of a scene, for preventing the personal privacy from recording or live viewing. You can turn on/off the PRIVACY to meet your needs.

3.6 FACTORY DEFAULT

Reset all the settings to the factory default.

3.7 EXIT

Move the cursor to EXIT and click Iris+ to exit the menu.

3.8 SAVE & EXIT

Move the cursor to SAVE & EXIT and click Iris+ to save the settings, and exit the menu.

DE

BEDIENUNGSANLEITUNG
CCTV KAMERA

Warnhinweis:

Bitte lesen Sie die Bedienungsanleitung sorgfältig durch, bevor Sie das Gerät verwenden.
Diese Bedienungsanleitung enthält möglicherweise mehrere Parameter-Abweichungen oder Druckfehler. Wenn Sie Fragen haben, wenden Sie sich bitte an den Online-Kundendienst oder den Händler.

WARNHINWEIS:

Es besteht die Gefahr eines elektrischen Schlages

Warnhinweis:

Um das Risiko eines Stromschlages zu reduzieren, sollten nur ein Techniker die vordere oder hintere Abdeckung entfernen.

Warnhinweis:

Zur Vermeidung von elektrischen Schlägen und Brandgefahr wählen Sie bitte das entsprechende Netzteil für die Kamera.

Warnhinweis:

gleiche Änderungen oder Modifikationen, die nicht durch unser Unternehmen bei der Konstruktion des Produkts genehmigt wurden, können den Betrieb durch den Benutzer beeinträchtigen.

WARNHINWEIS:

01/ Installieren Sie die Kamera nicht in einer Umgebung, die nicht im vorgeschriebenen Temperaturbereich liegt.
Installieren und verwenden Sie die Kamera in Umgebungen zwischen 20°C und +50°C und bei guter Belüftung.

02/ Verwenden Sie die Kamera nicht in Umgebungen mit hohem Druck und stark ätzenden oder anderen speziellen Umgebungen.
Dies kann dazu führen, dass die Kamera nicht richtig arbeitet oder beschädigt werden kann.

03/ Verwenden Sie die Kamera nicht an einem Ort, der voller Staub ist und an dem Gas austritt.
Dies kann dazu führen, dass die Kamera nicht mehr funktioniert.

04/ Versuchen Sie nicht, die Kamera auseinander zu nehmen.
Wenn dies notwendig ist, tun Sie es bitte unter der Anleitung von professionellen Technikern.

05/ Lassen Sie die Kamera nicht fallen und schütteln Sie sie nicht.
Dies kann dazu führen, dass die Kamera nicht mehr funktioniert.

05/ Lassen Sie die Kamera nicht fallen und schütteln Sie sie nicht.
Dies kann dazu führen, dass die Kamera nicht mehr funktioniert.

06/ Berühren Sie das vordere Objektiv und den Sensor der Kamera nicht.

Achten Sie darauf, dass Sie keine Fingerabdrücke oder andere Flecken hinterlassen. Wenn die Kamera Blitzen oder anderem intensiven Licht ausgesetzt ist, kann das Bild unscharf werden. Vor dem Anschluss an die Stromversorgung prüfen Sie bitte, ob diese die Anforderungen der Spezifikation erfüllt oder nicht.

PRODUKTEIGENSCHAFTEN

- High-Performance Chips, hohe Auflösung, klare und feine Bilder.
- Unterstützt automatischen Weißabgleich, hohe Farbanpassung, realistisches Bild.
- Unterstützt automatische elektronische Klappe, Anpassung an verschiedene Monitoring-Umgebungen.
- Hohes S/N-Verhältnis, das Bild ist klar und angenehm für die Augen.
- Unterstützt Privatzoneabdeckung, BLC und digitale, breite Dynamik-Funktion.
- Unterstützt Auto-AGC, automatische Helligkeitsanpassung.
- Fortschrittliche doppelt verglaste Struktur, kein Lichtaustritt.
- Lange Lebensdauer.
- Einfache Installation und Fehlersuche.


INSTALLATION

Mit DVR als Überwachungs-Mainframe Erforderliche Ausrüstung: Kamera, Halterung (Dome Kamera unnötig); Netzteil; Kabel; DVR; Festplatte (HDD); Monitor oder Fernseher.

Installationschritte:

- A. Die Installation der Festplatte in den DVR. Einschalten des DVR, dann verbinden Sie das Gerät mit der Kamera zum Debugging der gesamten Überwachungs-ausrüstung.
- B. Installation der Kamera und Bestätigung der Position des DVR.
- C. Verkabelung und Anschluss des Steckers der Videokamera und des DVR-Kabels. Siehe die Abbildungen unten für die genaue Verbindung.

Hinweis: Dieser Vorgang ist nur für den Anschluss gedacht. Bitte bereiten Sie DVR, Netzteil, Videokabel vorab vor.



Hinweis: Dieser Vorgang ist nur für den Anschluss gedacht. Bitte bereiten Sie DVR, Netzteil, Videokabel vorab vor.



Shenzhen Kean Digital Co., Ltd.

Address: Room 1001, Rujun Building, No.105 Center Road, Bantian Street, Longgang District, Shenzhen, China.518000

Tech Support Email Address: support@annke.com

www.annke.com

CE RoHS

Made in China